

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** GLOBOSTAR® GROUP

**Supplier's address:** GLOBOSTAR® GROUP, THESSALONIKIS 98, 60132 KATERINI KATERINI PIERIAS, EL

**Model identifier:** SKU: 61018

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	WIRES - TERMINAL BLOCK		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	76	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	8 372 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...6000
On-mode power ( $P_{on}$ ), expressed in W	75,8	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,40
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	50	range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>		Yes	If yes, equivalent power (W)	200
			Chromaticity coordinates (x and y)	0,370 0,369
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value		17	Survival factor	0,90
the lumen maintenance factor		0,92		
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )		0,92	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,0	Stroboscopic effect metric (SVM)	0,0

(a)-: not applicable;

(b)-: not applicable;

SDCM: 4.6

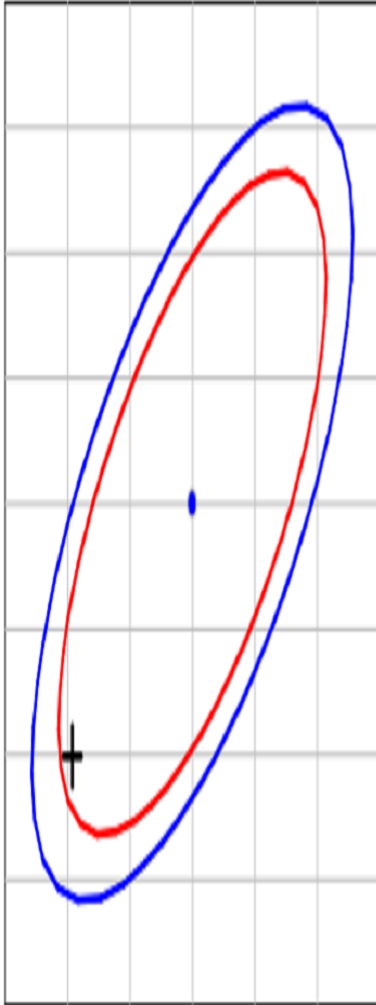

$x=0.3800$   $y=0.3800$  F4000

