


Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Feed Through Terminal : KUT 35



<b>Type of Connection</b>	MS Screw Clamp
<b>Insulating Material</b>	Polyamide 66
<b>Terminal Pitch</b>	17 mm ( 0.66 Inch)
<b>Terminal Width</b>	51 mm ( 1.99 Inch)
<b>Terminal Height</b>	58 mm ( 2.26 Inch)
<b>Rated Cross Section</b>	35 sq mm
<b>Wire Stripping Length</b>	17 mm
<b>Screw Size</b>	M6

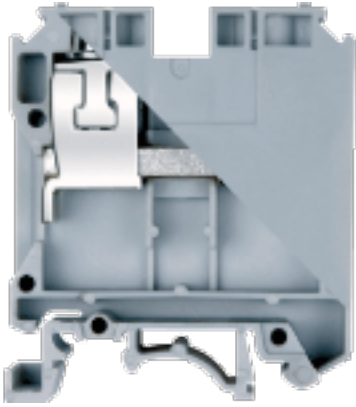

**Connection Possibility**

<b>Stranded wire</b>	Max : 35 sq mm	Min : 10 sq mm
<b>Solid wire</b>	Max : 35 sq mm	Min : 10 sq mm

Ratings	IEC	UL
Voltage	1000 V	600 V
Current	125 A	140 A
Conductor Size	35 sq mm	Min : 14 AWG    Max : 1 AWG
Tightening Torque	3 Nm	38 Lbln

**Terminal Accessories**

<b>Partition Plate With Foot</b>	KBZF
<b>Protection Cover</b>	PCK3
<b>End Clamp</b>	SCUN, SCUSL, SCUDD, SCKN, DCKN
<b>Cross Connection Link Assembly</b>	CCLA35K - 2W
<b>Link for Removable Shorting</b>	RSL35K
<b>Long Stud For Removable Shorting</b>	LSR35K
<b>Marking Label</b>	LABEL KN17
<b>Warning Label</b>	WARNING LABEL WL35
<b>Group Marking Carrier</b>	SCKNMLH, SCUNMLH, DCKNMLH
<b>Terminal Colours</b>	GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN
<b>Mounting Channel</b>	CHS10, CHK10, CHS3, CHS5, CHK5, CHK3, CHKS3, CHKS5, CHKS10, CHKDS10, CHKD10