


Product introduce:

The 1x2 HDMI Splitters uses a single HDMI source, accessing to multiple HDMI sinks. It allows one HDMI device to be split easily to 2 HDMI compatible monitors or projectors. In addition, it can be placed at the end of a long HDMI cable to regenerate the HDMI signal. The resolution of this HDMI splitter can be up to 3840x2160/30Hz.

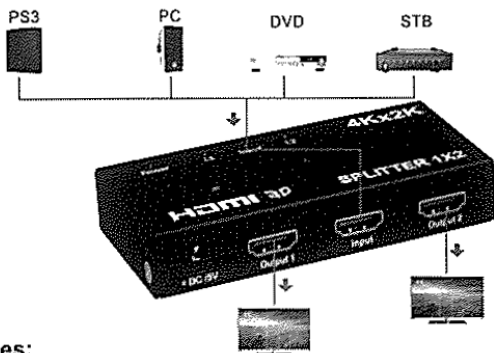


Features:

- Support HDMI 1.4b
- Support Full 3D
- Support HDMI resolution up to 3840x2160/30Hz
- Support the max baud rate of 3.4G and max bandwidth of 340Mhz
- Support deep color 8/10/12bit
- Support input up to 8 metres AWG26 HDMI standard cable length, output up to 8 metres AWG26 HDMI standard cable length
- Displaying single source, multi-output high-definition signal source from DVD player AV receiver, set-top box
- 5V/1A power adapter

Specifications:

HDMI version	HDMI 1.4b
HDMI resolution	up to 3840x2160/30Hz
Support video format	8/10/12bit Deep color
Support audio format.....	DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD
Max bandwidth.....	340MHz
Max baud rate.....	3.4Gbps
Input cable distance.....	≤8m AWG26 HDMI standard cable
Output cable distance.....	≤8m AWG26 HDMI standard cable
HDMI input.....	1 HDMI
HDMI output.....	2 HDMI
Max working current.....	500mA
Specifications of power adapter.....	input AC (50Hz, 60Hz) 100V-240V; output: DC5V/1A
Operating Temperature range.....	(-15 C to +55 C)
Operating Humidity range.....	5 to 90%RH (No Condensation)
Dimension (L x W x H).....	105x50x20 (mm)
Weight.....	120g

Product photos:

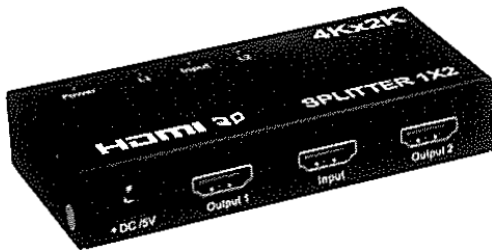

Connection and Operation:

1. Connect 1 HDMI cable from HDMI source devices into HDMI Splitter input.
2. Connect 2 HDMI cables from displays (monitors or projectors) into the HDMI Splitter outputs.
3. Connect 5V power supply to the HDMI 1x2 Splitter.

Package include :

1. HDMI splitter x1pc
2. Power adapter x1pc
3. User manual x1pc