


## DST 6



### Approvals

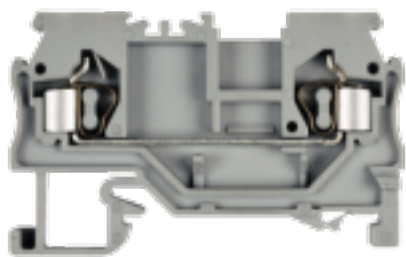

### General Data

Type	DST 6
Wire Termination Technology	Spring Clamp
Ratings	800 V/41 A/6 sq mm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	100
Country of Origin	India
Screw Size	NA

### Dimensions & Weight

Height (mm)	39.50
Height (inches)	1.55
Width (mm)	73.50
Width (inches)	2.89
Thickness (mm)	8
Weight For Standard Packing Qty (Kg)	1.76

## Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

## Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	6
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	6

## Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	41
Rated Cross Section (sq mm)	6
Short Time Withstand Current (kA)	0.72
Rated Impulse Withstand Voltage(kV)	8
Pollution Degree	III

## Ratings-ATEX

Certificate No	500
Rated Current (A)	35
Rated Cross Section (sq mm)	6

## Ratings-CSA

Rated Voltage (V)	600
Rated Current (A)	41
Wire Cross Section - min (AWG)	20

## Accessories

### End Plate

#### DSEP6

Height : 31 mm

Width : 73.50 mm

Thickness : 2.50 mm



### End Clamp

#### DCKN (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 6 mm



#### DCKN10 (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 10 mm



#### SCKN (35 mm Rail Mounted)

Height : 35.50 mm

Width : 50.60 mm

Thickness : 8 mm







