

Fully insulated receptacles, GCI...PCV

FEATURES & BENEFITS

- socket with long PVC insulating sleeve, with long Cu tube inside, for double crimping
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [szt.] 100

MECHANICAL DATA

Insulation polyvinyl chloride (PCV)


Material brass

Covering tin-plated

Operating temperature [°C] -5 ÷ +60

DIMENSIONS

L_1 25,0

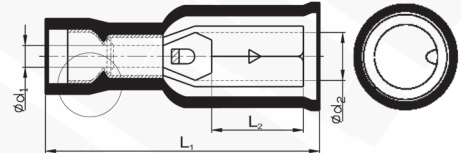

Type	Index Ergom	Cross-section [mm ²]	Insulation color	L_2	d_1	d_2	Weight [kg]
GCI 1/4 PCV (100 PCS)	E10KN-03030300101	0,75+1	red	7,3	1,7	3,9	0.11
GCI 2,5/4 PCV (100 PCS)	E10KN-03030300201	1,5+2,5	blue	7,3	2,3	3,9	0.13
GCI 2,5/5 PCV (100 PCS)	E10KN-03030300301			8,5		4,9	0.14
GCI 6/5 PCV (100 PCS)	E10KN-03030300401	4+6	yellow	8,5	3,4	4,9	0.21