

Features:

- ❑ two-phase controlled soft starter
- ❑ controlled by microcontroller
- ❑ optimized soft start
- ❑ current and torque reduction during acceleration
- ❑ easy mounting, for snap-mounting on
 - 35 mm standard rail
 - or directly mountable
- ❑ integrated bypass relay
- ❑ parameterization by means of three potentiometers
- ❑ no mains neutral conductor (N) required
- ❑ economically priced substitute for star-delta starters
- ❑ control side screw terminals
- ❑ compact design
 - 45 x 124 x 131mm (6-12A)
 - 45 x 154 x 131mm (22-32A)
- ❑ degree of protection IP20



Soft Starters
VS II plus ...-6...32




Functions:

- ❑ soft acceleration and deceleration
- ❑ potential-free control input for soft acceleration and deceleration
- ❑ 3 separately adjustable parameters
accel. time, start voltage, decel. time
- ❑ boost-start selectable
- ❑ potential-free relay output (closed, when motor is running)

Typical Applications:

door and gate drives
pumps, ventilators, fans
conveying systems, packaging machines
transport systems, assembly lines, machine applications

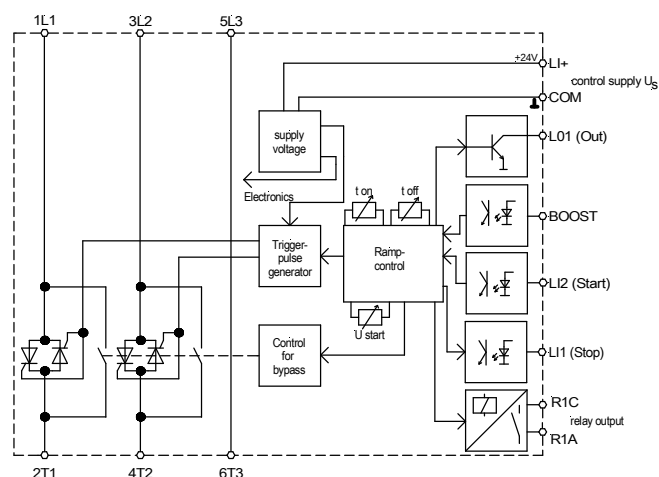


Technical specifications	VS II plus 480-6 B, 24VDC	VS II plus 480-9 B, 24VDC	VS II plus 480-12 B, 24VDC	VS II plus 480-22 B, 24VDC	VS II plus 480-32 B, 24VDC
device rated current	6A	9A	12A	22A	32A
motor rated power at 400V mains voltage	3kW	4,5kW	5,5kW	11kW	15kW
mains / motor voltage	3x 200...480VAC -15% / +10% 50/60Hz				
control voltage	24VDC ±10% (max. 28VDC) / 21,6W				
order number	26300.48006	26300.48009	26300.48012	26300.48022	26300.48032
max. power loss:					
- on standby	<3W	<3W	<3W	<3W	<3W
- in ramp-up	62W	92W	122W	223W	323W
- in bypass	1,5W	1,5W	1,5W	2,5W	2,5W
minimum motor current	20% of the device rated current				
start-up time	1 ... 10s				
starting voltage	30 ... 80%				
run-out time	1 ... 10s				
max. switching frequency at 3xI _e , 5s t _{an} and ED=70%	20				10

cross-sectional area	AWG 20...14	
control terminals	0,5 - 1,5mm ² (stripping length 10mm)	
cross-sectional area	AWG 16...10	
power terminals	1...6mm ²	
tightening torque	power terminals 1,9 ... 2,5Nm control terminals 0,5 Nm	
I ² t – power semiconductor in A ² s	390	9100
switching rating of relay output	2A / 250VAC / 30VDC	
overvoltage category / pollution degree	Power contacts: 3 / Auxiliary contacts (Output Relays): 2 2	
surge strength	Power contacts 4kV / Auxiliary contacts (Output Relays): 2,5kV	
insulation voltage	480VAC	
Category of use	AC53b: 6-3: 117	
protection class	IP20	
ambient / storage temperature	-10°C ... 50°C (Derating: higher 40°C - 2% per °C up to max. 50°C) -25°C ... 70°C	
relative humidity	5...95% without condensation or dripping water (corresponds to EN/IEC 60068-2-3)	
weight in kG	0,3kG	0,5kG
Dimensions W x H x D	45 x 124 x 131 mm	45 x 154 x 131 mm

Note:

Please pay attention and consider for the operation of IE3 motors while dimensioning of softstarters the resulting higher starting and braking currents.

For the use of IE3 motors we highly recommend to dimension and design the needed softstarters one size higher.

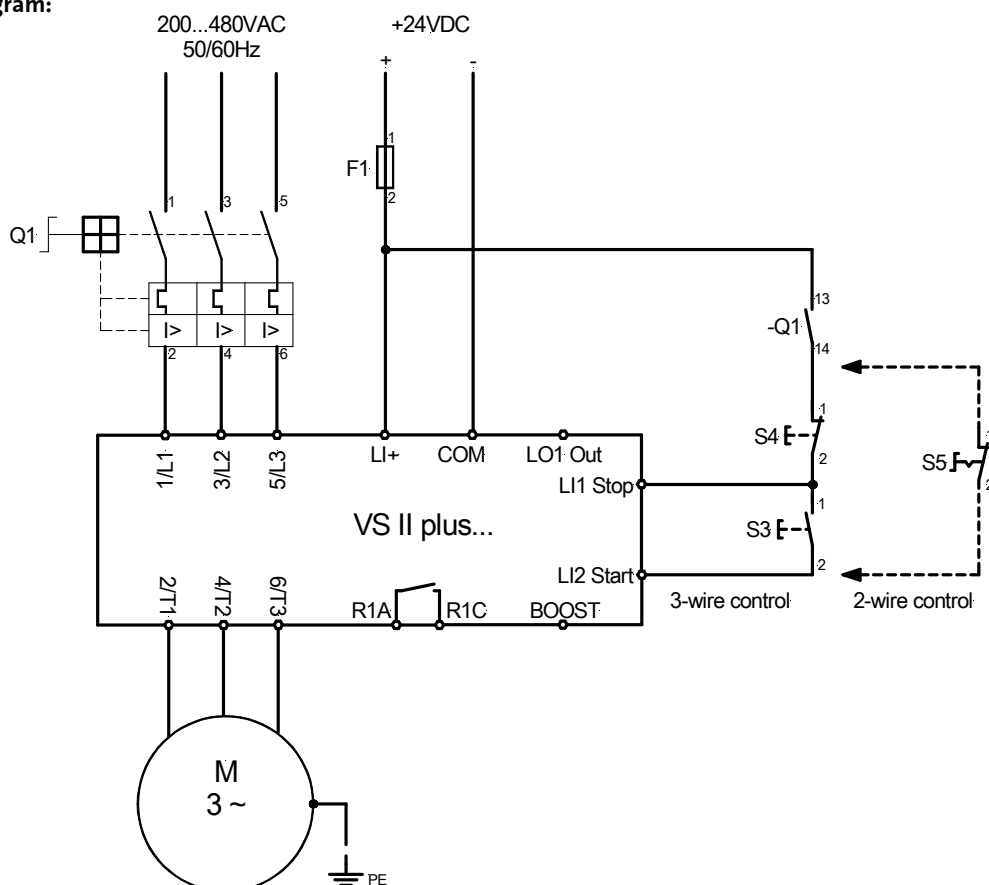Connection Diagram:

Subject to change without notice.

Features:

- ❑ two-phase controlled soft starter
- ❑ controlled by microcontroller
- ❑ optimized soft start
- ❑ current and torque reduction during acceleration
- ❑ easy mounting, for snap-mounting on
 - 35 mm standard rail (38-65A-Devices)
 - 35 mm and 75mm standard rails (80-105A- Devices)
 - or directly mountable
- ❑ integrated bypass relay
- ❑ parameterization by means of three potentiometers
- ❑ no mains neutral conductor (N) required
- ❑ economically priced substitute for star-delta starters
- ❑ Push-In Controlterminals
- ❑ heat sink temperature monitoring
- ❑ compact design, 55mm at up to 65A and 81mm at up to 105A
- ❑ degree of protection IP20



Soft Starters
VS II plus ...-38...105



Functions:


- ❑ soft acceleration and deceleration
- ❑ potential-free control input for soft acceleration and deceleration
- ❑ 3 separately adjustable parameters
accel. time, start voltage, decel. time
- ❑ boost-start selectable
- ❑ potential-free relay output (closed, when motor is running)

Options: (upon request)

- ❑ External fan

Typical Applications:

door and gate drives
pumps, ventilators, fans
conveying systems, packaging machines
transport systems, assembly lines, machine applications

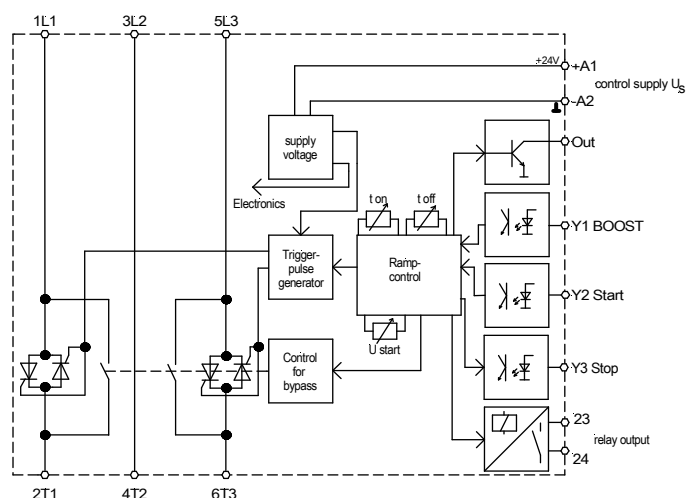


Technical specifications	VS II plus 480-38 B, 24VDC	VS II plus 480-45 B, 24VDC	VS II plus 480-65 B, 24VDC	VS II plus 480-80 B, 24VDC	VS II plus 480-105 B, 24VDC
device rated current	38A	45A	65A	80A	105A
motor rated power at 400V mains voltage	18,5kW	22kW	30kW	45kW	55kW
mains / motor voltage	3x 200...480VAC -15% / +10% 50/60Hz				
control voltage	24VDC ±10% (max. 28VDC) / 21,6W				
order number	26300.48038	26300.48045	26300.48065	26300.48080	26300.48105
max. power loss:					
- on standby	<3W	<3W	<3W	<3W	<3W
- in ramp-up	220W	264W	397W	512W	703W
- in bypass	7W	9W	16W	16W	27W
minimum motor current	20% of the device rated current				
start-up time	0,5 ... 20s				
starting voltage	30 ... 90%				
run-out time	0 ... 20s				

	VS II plus 480-38 B, 24VDC	VS II plus 480-45 B, 24VDC	VS II plus 480-65 B, 24VDC	VS II plus 480-80 B, 24VDC	VS II plus 480-105 B, 24VDC
Restart time	200ms				
max. switching frequency at 3xI _e , 5s t _{an} and ED=70%	50	35	13	25	10
cross-sectional area control terminals	AWG 24...12 0,2 - 2,5mm² (stripping length 10mm)				
cross-sectional area power terminals	AWG 16...2 1...35mm² (stripping length 16mm)			AWG 14...2/0 2...70mm² (stripping length 20mm)	
I²t – power semiconductor in A²s	20800			126300	
tightening torque	8 Nm / 70lb.in			9 Nm / 80lb.in	
switching rating of relay output	1A / 250VAC / 30VDC				
overvoltage category / pollution degree	Power contacts: 3 / Auxiliary Contacts (Output Relays): 2 2				
surge strength	Power contacts 4kV / Auxiliary Contacts (Output Relays): 2,5kV				
insulation voltage	480VAC				
Category of use	AC53a: 3-5: 70-50	AC53a: 3-5: 70-35	AC53a: 3-5: 70-13	AC53a: 3-5: 70-25	AC53a: 3-5: 70-10
protection class	IP20				
ambient / storage temperature	-10°C ... 60°C (-10°C ... 40°C without Derating) -40°C ... 70°C				
relative humidity	5...95% without condensation or dripping water (corresponds to EN/IEC 60068-2-3)				
weight in kG	1,3kG			2,3kG	
Dimensions W x H x D	55 x 179 x 165 mm			81 x 222 x 180 mm	

Note:

Please pay attention and consider for the operation of IE3 motors while dimensioning of softstarters the resulting higher starting and braking currents.

For the use of IE3 motors we highly recommend to dimension and design the needed softstarters one size higher.

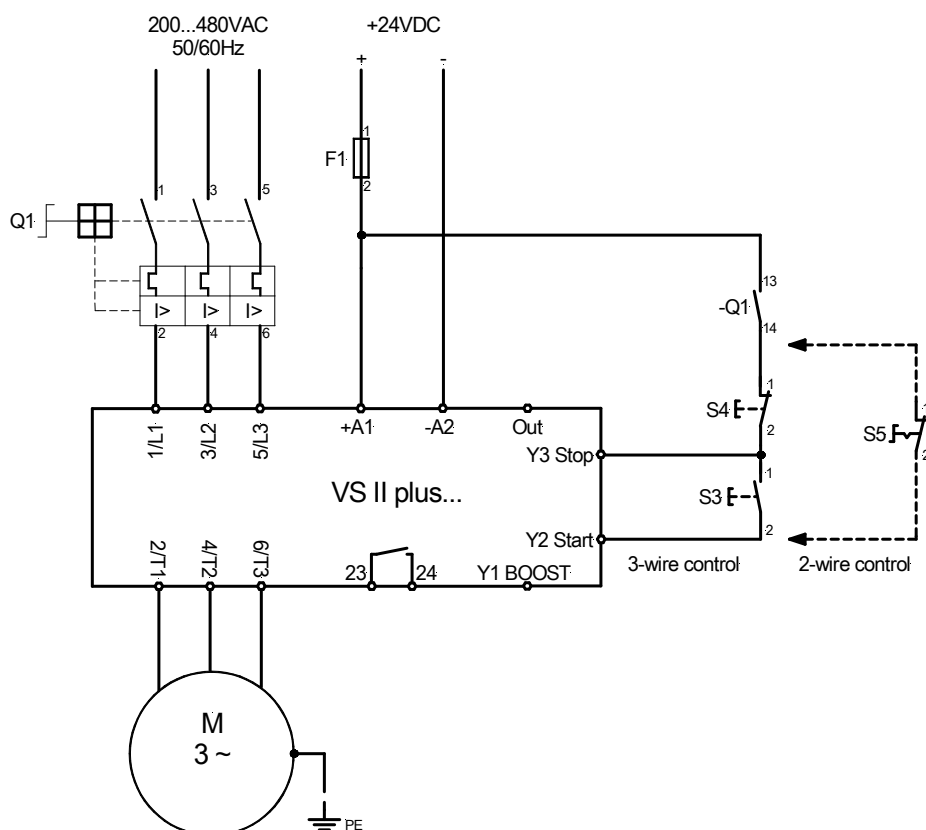Connection Diagram:

Subject to change without notice.