

# PC 25/22-3



Sample image

**Order symbol :** PC 25/22-3

**Product nr :** 7525134









**Description :** Enclosure, PC

**Remarks :** Smoked transparent hinged cover

**EAN :** 6418074059390

**El. number :**

- Finland : 3438232
- Denmark : 8212052411
- Sweden : 7525134

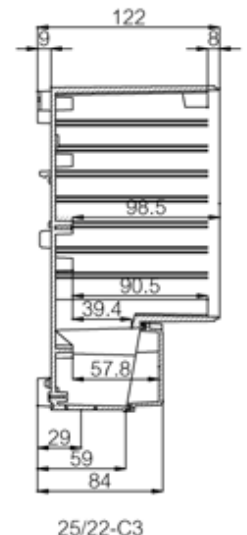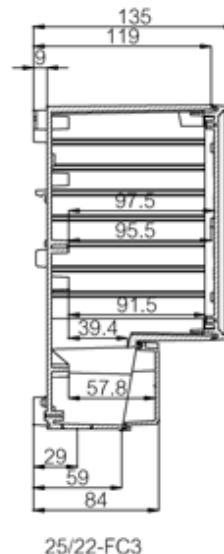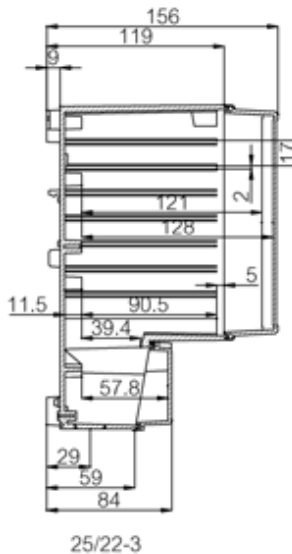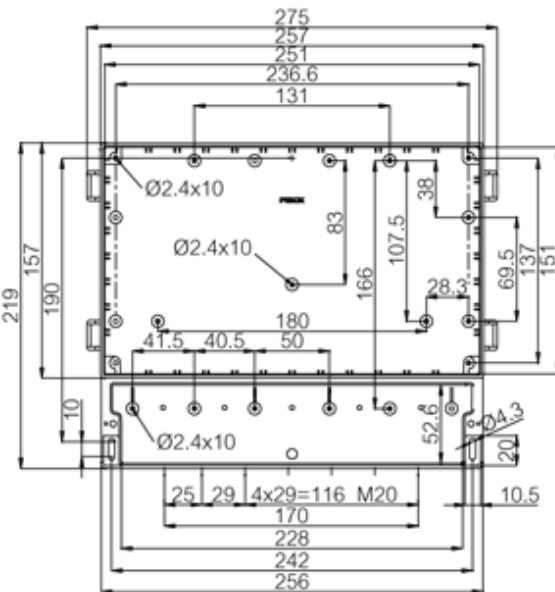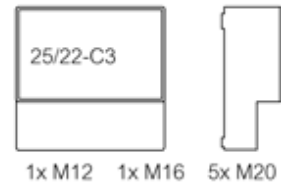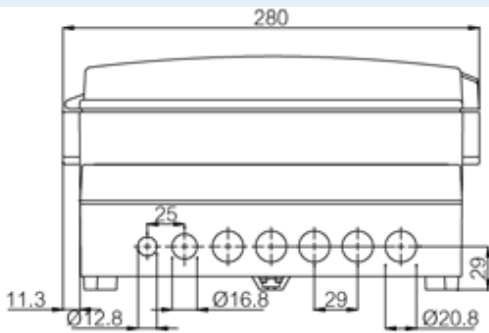

Dimensions :	Height	Width	Depth
mm :	280	219	156

Accessories :	
MP 25/22	Mounting plate, for enclosures:

inch : 11.02 8.62 6.14

**Materials :**

Material : Polycarbonate  
Base colour : RAL\_7035  
Cover colour : Smoked grey  
Gasket material : Polyurethane

**Temperatures :**

Temperature °C (short term) : -40 ... 120  
Temperature °C (continuous) : -40 ... 80  
Temperature °F (short term) : -40 ... 250  
Temperature °F (continuous) : -40 ... 175

(225 x 175 x 1)

FC PC 25/22 Frame of PC front plate, for enclosures:  
(257 x 157 x 30)

FP 25/22 Front plate (aluminium), for enclosures:  
(250 x 150 x 1)

**Ratings :**

Ingress protection (EN 60529): IP66; IP67;  
Impact Resistance (EN 62262): IK07;  
electrical\_insulation : Totally insulated  
Halogen free (DIN/VDE 0472, Part 815) : Yes  
UV resistance : UL 746C  
Flammability Rating : UL 94 V0  
Glow Wire Test (IEC 695-2-1) °C : 960C

**Certificates :**

SGSFIMKO\_CARDpc